

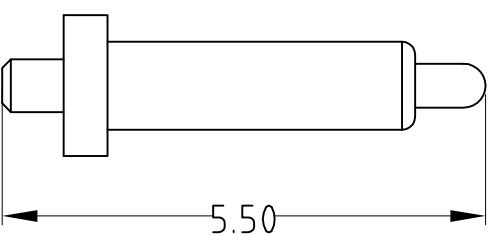


- NOTES:
- 1.0 PLATING:
 - 1) Contact plating: brass Au3u" over 50u-120u" Ni
 - 2) Contact solder area plating: brass Au 3u" over 50u-120u" Ni
 - 3) Spring: SUS
 - 2.0 Rated voltage(Per Contact): 5 Volts
 - 3.0 Rated Current(Per Contact): 1.0A
 - 4.0 Insulation Resistance: 100MΩ minimum
 - 5.0 Dielectric Withstanding Voltage: 100V at 60HZ
 - 6.0 Contact Resistance: 30mΩ maximum before test and 60mΩ maximum after test at pogo pin working stroke
 - 7.0 Recommended Working Stroke&Force:
 - 1) Stroke: 1.0mm(Per Contact): 40gf±15gf
 - 8.0 Mechanical life:
 - 1) Mechanical life: 10,000 Cycles Min
 - 9.0 Working Temperature Range: -30~85°

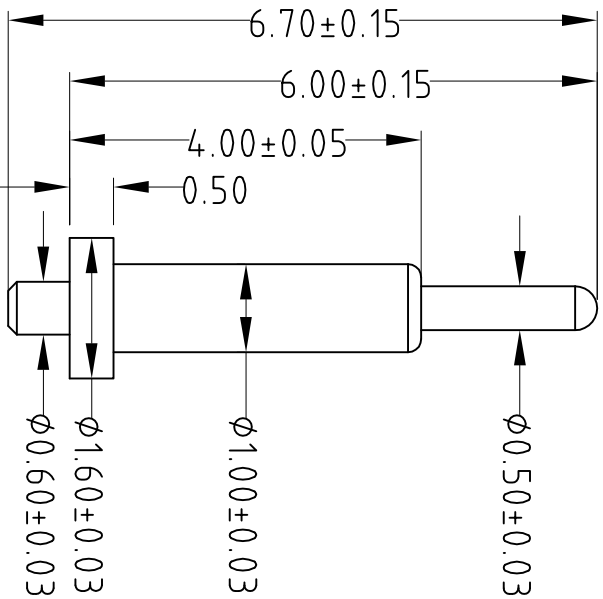

最大压缩高度

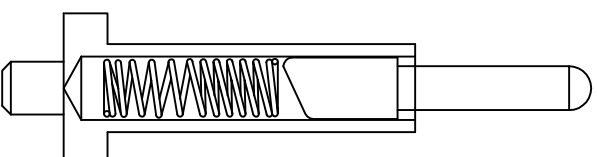

剖视图

变号	变号
变号	变号
变号	变号

POMAGTOR
磁性连接—專業為您定制

深圳市泰科汉泽精密电子有限公司
Pomagtor Precision Electronics

变更说明	变更描述	原因	设计者	日期	描述	料号	单位	1.6-6.7P0080 PIN, 针头A03U", 针管A03U"	MM	绘图/日期	审核/日期	版本	比例
1												A1	1:1
2								未标准尺寸公差: ±0.15					
3								未标注角度公差: ±1°					