
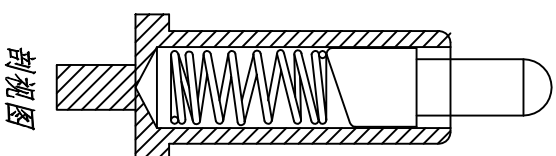
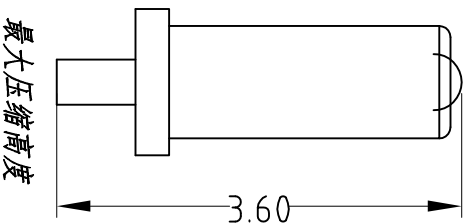
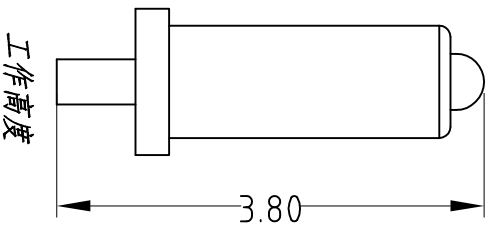


NOTES:
1.0 PLATING:

- 1) Contact plating: brass Au5u"over 50-80u" Ni
- 2) Contact solder area plating: brassAu 7u" over 50-80u" Ni
- 3) Spring: SUS AU1-3U
- 2.0 Rated voltage(Per Contact): 5 Volts
- 3.0 Rated Current(Per Contact): 1A maximum
- 4.0 Recommended Working Stroke&Force:
- 1) Stroke 0.7 mm(Per Contact): 60gf±20gf
- 5.0 Mechanical life:
- 1) Mechanical life: 10,000 Cycles Min
- 6.0 Working Temperature Range: -30~85°

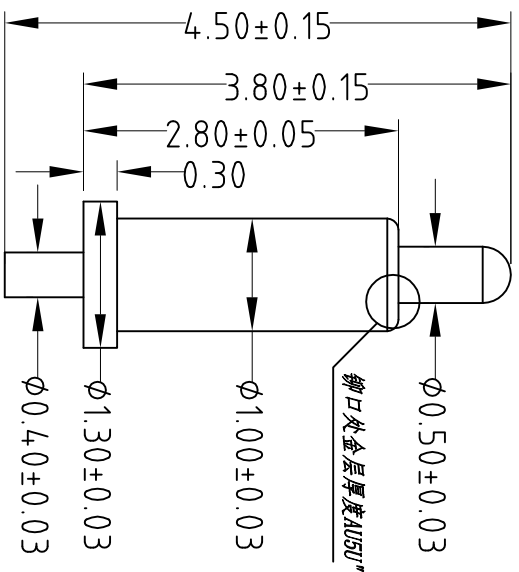

模架号	模架号
-----	-----
-----	-----

POMAGTOR
磁性連接—專業為您定制

深圳市泰科汉泽精密电子有限公司
Pomagtor Precision Electronics

变更说明	序号	变更描述	原因	设计者	日期	描述	料号	单位	公差	绘图/日期	审核/日期	版本
1						1.3-4.5P0G0 PIN, C3604, 材料AUSU, 材料7U"	HY90-00858-002		±0.15	MM	郑巧云	A1
2						未标准尺寸公差: ±0.15						1:1
3						未标注角度公差: ±1°						2017.11.1