
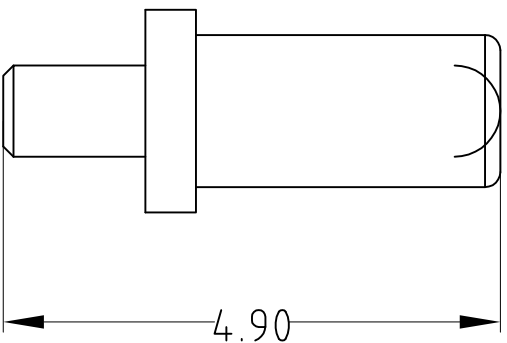
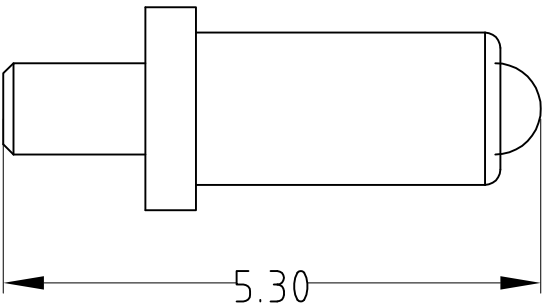


- NOTES:
- 1.0 PLATING:
    - 1)Contact plating:brass Au5u"over 50-80u" Ni
    - 2)Contact solder area plating: brassAu 5u" over 50-80u" Ni
    - 3)Spring: SUS
  - 2.0 Rated Current(Per Contact): 12 Volts
  - 3.0 Rated Current(Per Contact): 2A
  - 4.0 Insulation Resistance: 100MΩ minimum
  - 5.0 Dielectric Withstanding Voltage:100V at 60HZ
  - 6.0 Contact Resistance: 30mΩ maximum before test and 60mΩ maximum after test at pogo pin working stroke
  - 7.0 Recommended Working Stroke&Force:
    - 1)Stroke 0.6 mm(Per Contact): 100gf±20gf
    - 8.0 Mechanical life: 1)0.6mm(Mechanical life): 10,000 Cycles
    - 9.0 Working Temperature Range: -30~85°

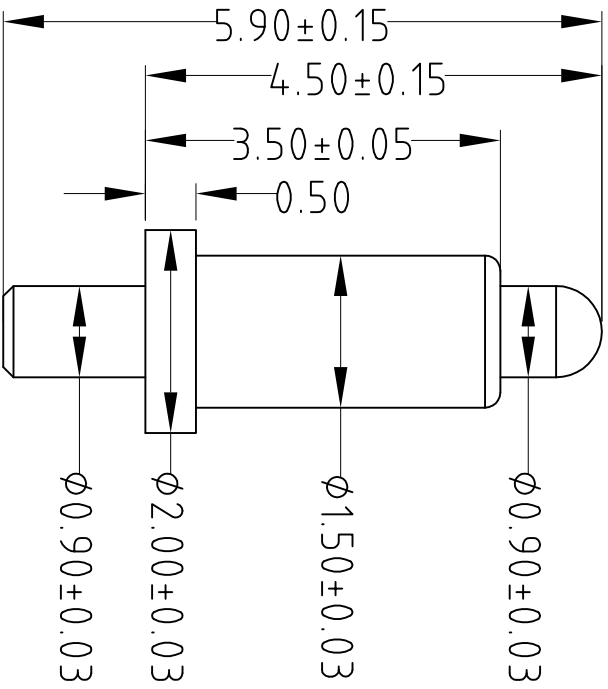

A B C D

变更新说明		变更描述	原因	设计者	日期	描述	料号	单位	MM	绘图/日期	审核/日期	版本	比例
1												A1	1:1
2													
3													

**POMAGTOR**  
 磁性连接—專業為您定制

深圳市泰科汉泽精密电子有限公司  
 Pomagtor Precision Electronics

2.0-5.9P000 PIN, 黄铜C3604, 镀金5U

1	2	3	4	5	6
---	---	---	---	---	---