
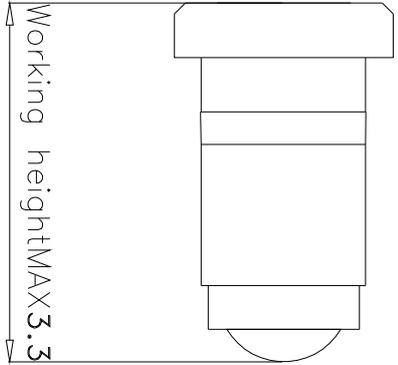


国内最专业的磁铁连接器制造商-泰科汉泽只造精品

序号	变更描述	变更原因	变更署名	日期
1				

NOTES:
1.0 PLATING:

- 1) Contact plating: brass Au1u" over 50-80u" Ni
- 2) Contact solder area plating: brassAu1u" over 50-80u" Ni
- 3) Spring: SUS
- 2.0 Rated voltage(Per Contact): 12 Volts
- 3.0 Rated Current(Per Contact): 1.2A maximum
- 4.0 Insulation Resistance: 100MEGAOHMS Minimum
- 5.0 Dielectric Withstanding Voltage: 100VRMS AT 60HZ
- 6.0 Contact Resistance: 30mΩ maximum before fest and 60mΩ maximum after test at pogo pin working stroke
- 7.0 Recommended Working Stroke&Force:
1) Stroke 0.4mm(Per Contact):40gfMin
2) Stroke 0.95mm(Per Contact):150gfMax
- 8.0 Mechanical life:
1) 0.8mm(Mechanical life):30,000 Cycles Min
- 9.0 Working Temperature Range: -30~85°

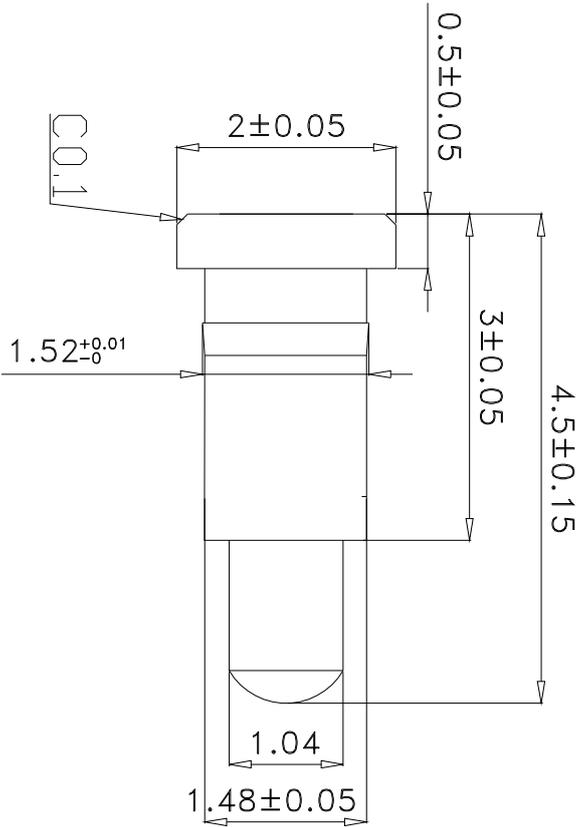

深圳市泰科汉泽精密电子有限公司
Tyco Hancorn Precision Electronics

产品名称	2.0*4.5顶针	产品规格	2.0*4.5	版本	A0
产品编号	HY90-00006-012	使用材料	见附表	比例	1:1
图面编号	HY9020140606001	表面处理	见附表	单位	mm
未注尺寸公差:	±0.15	繪圖/日期	陈海滨		2014-06-06
未注角度公差:	±1°	審核/日期			