
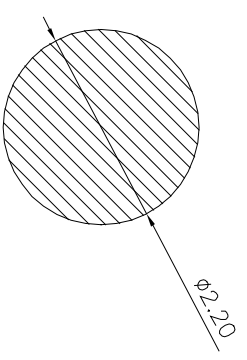
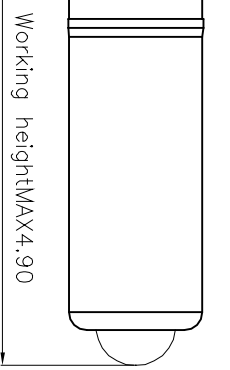


| | | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

变更针头与针管结构

NOTE:

- 1. Material
Plunger: Brass
- 2. Plating
Contact surface: 1u" minimum Au over 80~100u" Ni
- 3. Electrical
Rated Current & Voltage: DC 12V; AC 1~1.65A, 24H
Contact Resistance: 25mΩ maximum
- 4. RoHS COMPLETED PRODUCT.
- 5. Elasticity: Stroke 0mm: 10gf; Stroke 0.25mm: 50gf; Stroke 1.60mm (or fully compressed): 100-150gf
- 6. Life (Million): stroke range Max 0.5~4mm, 根据Pin的总类不一样Max. Stroke 10000次
Touch down后重量变化 0.5g以内 Creep变形最小化
- 7. Temperature: -40度~150度
- 8. Use: 电子摄影; 通电; 手机; 天线; 接地; 电池接触。

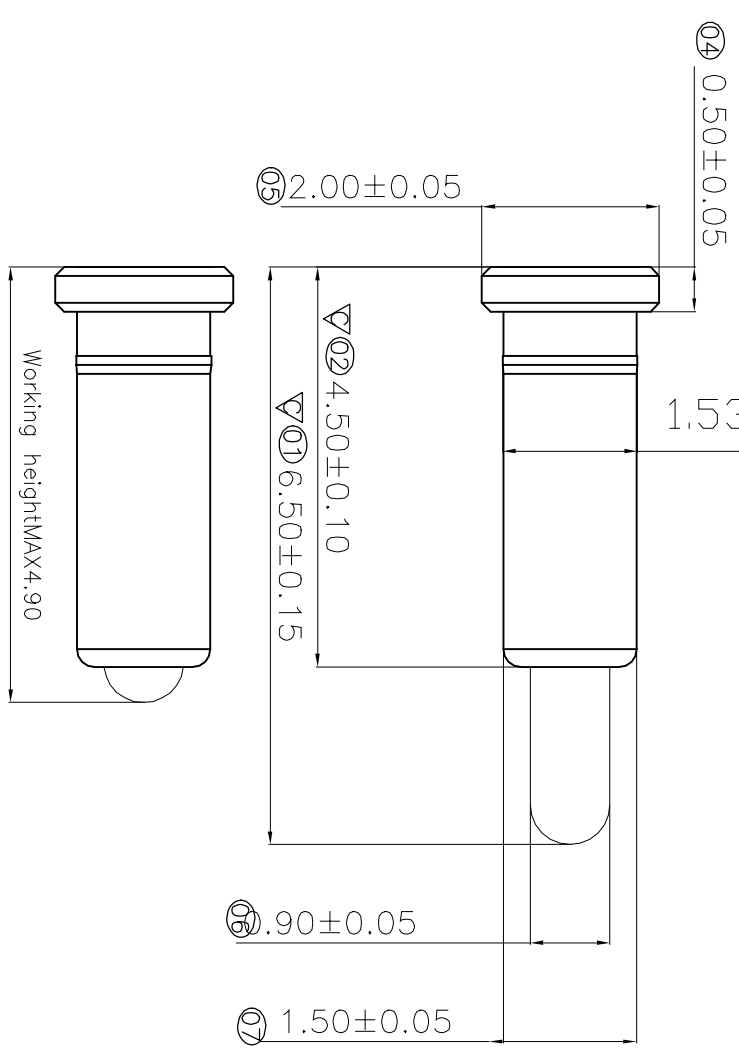

PCB LAYOUT

Layout Tolerance: ±0.20mm

深圳市泰科汉泽精密电子有限公司
Tyco Hanconn Precision Electronics

| | | | |
|------------|-----|-----------|----------------------|
| DRAW NO. | | DATE | 2012.02.13 |
| DESIGN: | 譚立強 | MATERIAL: | Brass C3604 |
| CHECK: | | FINISH: | Au1~3u" Ni, 80~120u" |
| REVIEW: | | FILE: | |
| | | P/N: | SEE TABLE |
| | | REV: | A1 |
| | | SCALE: | N/A |
| DRAW NAME: | | UNIT: | mm |
| | | SHEET: | 1/1 |
| SEE TABLE | | | |

| DIM | TOL | DIM | TOL |
|-------|-------|--------|-----|
| X | | X | 3' |
| X.X | ±0.20 | X.X' | |
| X.XX | ±0.15 | X.XX' | |
| X.XXX | ±0.10 | X.XXX' | |