



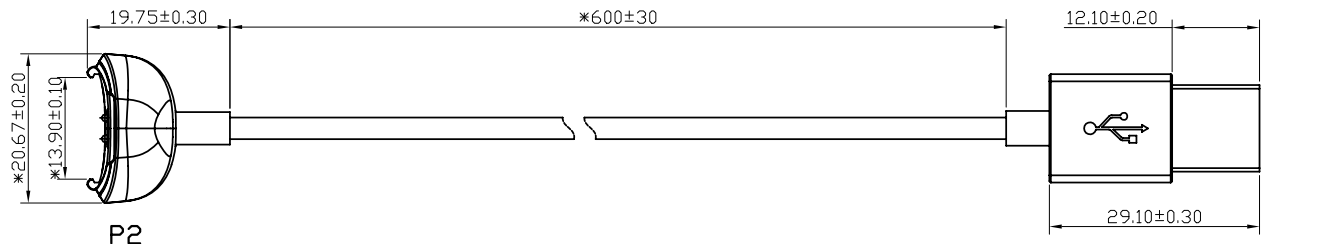


REV	ECN NO.	DETAILS	BY	DATE
1	-	-	---	--
2				
3				




(19/0.08+250D)*2C(红色, 黑色)
黑色TPE 外被3.0mm

CABLE SPEC:

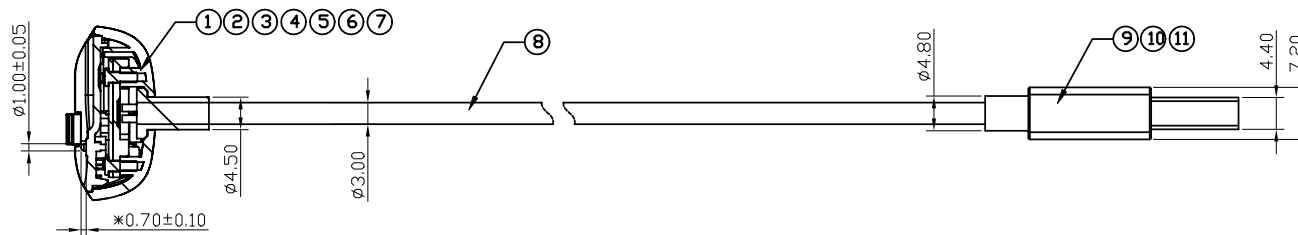

技术要求:

- a. 半成品用线材测试仪100%断/短导通测试;
- b. 成品用客户的产品配合连接测试功能测试;
- c. 导通阻抗: 2Ω (max);
- d. 绝缘阻抗: 300V/DC 10M Ω (min)
2. 摇摆测试: 吊重300g, $\pm 60^\circ$, 35次/分, 2000次, 外观功能正常;
3. 吊重测试: 吊重750g, 持续/1分钟, 外观功能正常;
4. 拉伸测试: 拉力值5.0Kg, 受力拉伸2次, 外观功能正常;
5. 插拔测试: 插拔1000次, 速率50次/分, 外观功能正常;
6. 汗液测试: 24H金属镀层无氧化, 外观功能正常;
7. 盐雾测试: 48H金属镀层无氧化, 外观功能正常;
8. 跌落测试: 高度1.0M分, 6个面各2次进行跌落12次, 外观功能正常;
11. 工作温度范围: $-30 \sim 85^\circ\text{C}$
12. 重点管控尺寸用“*”表示.



11	External Molding Plastic	TPE	Black	6g	-
10	Internal Molding Plastic	PE	Transparent	5g	-
9	USB	PBT+BRASS +SPCC	Pin:Gold Flash Plating Shell:Nickel Plating	1pcs	-
8	Cable	TPE	Black	0.64m	$\phi 3.0$
7	SR	TPE	Black	1pcs	-
6	PCBA	FR4	Lead free tin spraying	1pcs	14.3*4.2*1.0mm
5	Screw	SUS	Nickel Plating	2pcs	-
4	Pogo Pin	HBI59	Plunger Finish:Gold 0.075um Min Barrel Finish:Gold 0.025um Min	2pcs	$\phi 2.0 \times 5.0$
3	Bracket	PC1414	Black	1pcs	-
2	Rear shell	PC540	Black	1pcs	-
1	Face shell	PC540	Black	1pcs	-
Item	Part Name	Material	Finish	Q TY	Remark

*UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN
MILLIMETRES
LINEAR TOLERANCE:
X: ± 0.20 .X: ± 0.15 .XX: ± 0.10
X*: $\pm 2^\circ$.X*: $\pm 0.5^\circ$
Pomagtor
Website:www.pomagtor.net

POMAGTOR
PROFESSIONAL CUSTOMIZATION SINCE 2007
HIGH FREQUENCY POGO PIN .MAGNETIC CONNECTOR

TITLE	Connecting Cable	REV	A4	DRAWN BY	CHECKED BY	APPROV BY
SPEC	ID-BF200 PH=2.9 0.6M	SCALE	1	Lemon	Qingsong	Eidson
PART NO	HY901.0202900060-01	UNIT	mm			
VEIW ANGLE		DATE	2021/12/14			
		SHEET	1 of 1			