






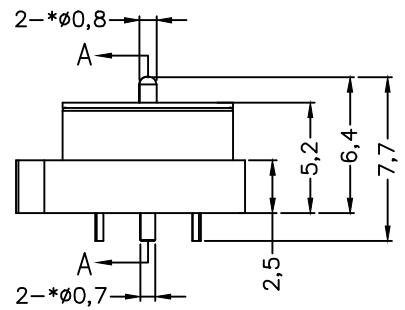

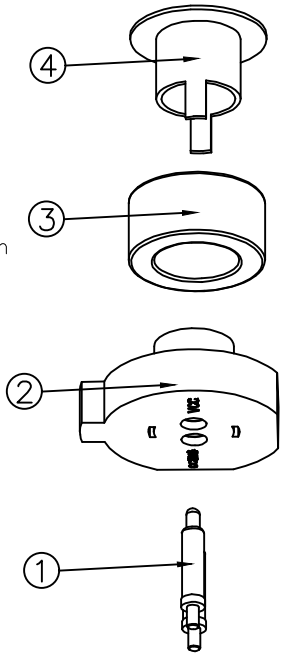

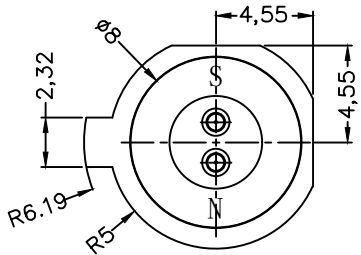


REV	ECN NO.	DETAILS	BY	DATE
1	A0	new version release	LZH	2022/07/06
2	A1	针头镀层更新为镀钽金3u” 针管镀钽金1u” 其他不变	LZH	2022/10/11
3				

- NOTES:
- 1.0 Rated voltage: 1.5 Volts
  - 2.0 Rated Current: 1A maximum
  - 3.0 Contact Resistance: 30mΩ maximum
  - 4.0 Recommended Working Stroke&Force:
    - 1)Stroke 1.0mm 30±10gf
  - 5.0 Mechanical life:
    - 1)Mechanical life:10,000 Cycles Min
  - 6.0 Salt Spray:48H Min
  - 7.0 Working Temperature Range: -40~85°C
  - 8.0 Marked with "\*" as key dimension
  - 9.0 The product must conform to the latest RoHS CP65



SECTION A-A



5	plastic tube	-	Comes with 2 rubber plugs	1pcs	-
4	electrode ring	H59	Ni1.5~3.0um+Pd 0.075um	1pcs	-
3	magnet	N52	Nickel plated after 48 hours of salt spray	1pcs	-
2	Housing	PA9T White	Fire rating: UL94V-0	1pcs	-
1	pogopin	HBI59-1.5	Plunger Ni1.5~3.0um+Pd 0.075um Barrel Ni1.5~3.0um+Pd 0.025um	2pcs	-
Item	Part Name	Material	Finish	Q'TY	Remarks



\*UNLESS OTHERWISE STATED  
ALL DIMENSIONS ARE IN  
MILLIMETRES  
LINEAR TOLERANCE:  
X.±0.20 .X±0.15 .XX±0.10  
X\*±2° .X\*±0.5°  
Pomagtor  
Website:www.pomagtor.net

**POMAGTOR**  
PROFESSIONAL CUSTOMIZATION SINCE 2007  
HIGH FREQUENCY POGO PIN MAGNETIC CONNECTOR











ITEM	8MM 3P/M PH1.9 White	REV	A1	DRAWN BY	LZH	CHECKED BY		APPROVED BY	
S/N.	-	SCALE	1						
RD.S/N.	RD90.LZH0220702-001	UNIT	mm						
VEIW ANGLE		DATE	2022/10/11						
		SHEET	1 of 1						

ROHS Executive (Pd)  
 Reach Executive HF


REV	ECN NO.	DETAILS	BY	DATE
1	A0	new version release	LZH	2022/07/06
2	A1	插针镀层更新为镀钯金3u”其他不变	LZH	2022/10/11
3				

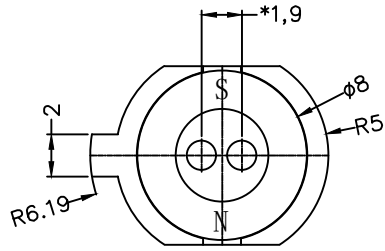

NOTES:  
 1.0 Rated voltage: 1.5 Volts  
 2.0 Rated Current: 1A maximum  
 3.0 Contact Resistance: 30mΩ maximum  
 4.0 Salt Spray: 48H Min  
 5.0 Working Temperature Range: -40~85°C  
 6.0 Marked with "\*" as key dimension  
 7.0 The product must conform to the latest RoHS CP65

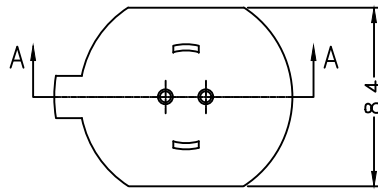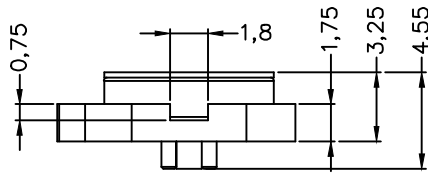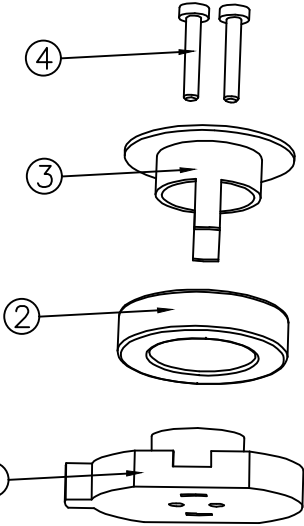

SECTION A-A



5	plastic tube	-	Comes with 2 rubber plugs	1pcs	-
4	pin	HBI59-1.5	Ni1.5~3.0um+Pd 0.075um	2pcs	-
3	electrode ring	H59	Ni1.5~3.0um+Pd 0.075um	1pcs	-
2	magnet	N52	Nickel plated after 48 hours of salt spray	1pcs	-
1	Housing	PA9T White	Fire rating: UL94V-0	1pcs	-
Item	Part Name	Material	Finish	Q'TY	Remarks

*UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES LINEAR TOLERANCE: X:±0.20 .X:±0.15 .XX:±0.10 X°:±2° .X°:±0.5° Pomagtor Website:www.pomagtor.net		<b>POMAGTOR</b> PROFESSIONAL CUSTOMIZATION SINCE 2007 HIGH FREQUENCY POGO PIN .MAGNETIC CONNECTOR				
ITEM	8MM 3P/F PH1.9 White	REV	A1	DRAWN BY	CHECKED BY	APPROVED BY
S/N.	-	SCALE	1	LZH		
RD.S/N.	RD90.LZH0220702-001	UNIT	mm			
VEIW ANGLE		DATE	2022/10/11			
		SHEET	1 of 1			