Manner of packing			REV'	ECN NO'	LOCAS'	DESCRIPTION	DATE	DESIGN
PE Bag	1.0K		A0			NEW	2012.02.13	譚立強

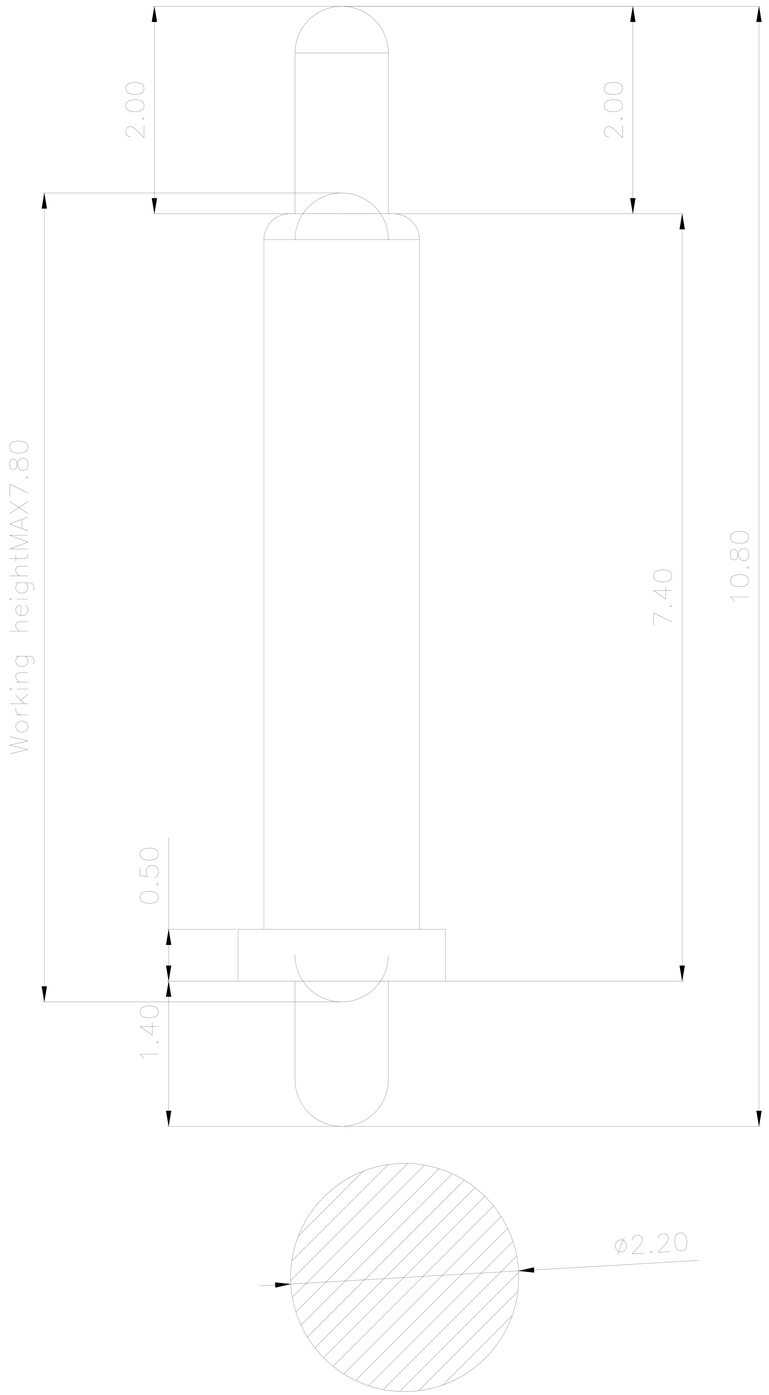

PCB LAYOUT

Layout Tolerance:±0.20mm

NOTE:

1.Material
 .Plunger: Brass
2.Plating
 .Contact surface:1u" minimum Au over 80~100u" Ni
3.Electrical
 .Rated Current & Voltage: DC 12V; AC 1~1.65A,24H
 .Contact Resistance: 25mΩ maximum
4.RoHS COMPLIED PROUCT.
5.Elasticity:Stroke 0mm:10gfStroke 0.25mm:50gf Stroke 2.80mm
 (or fully compressed):100-150gf
6.Life (Million):stroke range Max0.5~4mm,根据Pin的总类不一样Max.
 Stroke 10000次 Touch down后重量变化 0.5gf以内Creep变形最小化
7.Temperature: -40度~150度
8.Use:电子摄影：通电；手机：天线、接地、电池接触。

级别				品名	料号	单位	用量	材质
0	1	2	3					
0				2.0*10.80双头弹 Ni50~90u" Au1u"	HY90-00085-001	PCS	1	
	1							
		2		1.20*3.40针头	HY60-00011-003	PCS	1	C3604
			3	1.20圆铜棒	HY50-00001-005	mm/pcs	3.20	C3604
	1			1.20*3.60针头 Ni50~90u" Au1u"	HY70-00016-001	PCS	1	
		2		1.20*3.60针头	HY60-00016-001	PCS	1	C3604
			3	1.20圆铜棒	HY50-00001-005	mm/pcs	4.10	C3604
	1			2.0*7.40针管 Ni50~90u" Au1u"	HY70-00063-006	PCS	1	
		2		2.0*7.40针管	HY60-00063-006	PCS	1	C3604
			3	2.0圆铜棒	HY50-00001-013	mm/pcs	4.10	C3604
	1			0.13*0.75*7.6*26N弹簧	HY51-00049-001	PCS	1	SUS304



Spring Probe

深圳市泰科汉泽精密电子有限公司

Tyco Hanconn Precision Electronics

DIM	TOL	DIM	TOL
X.		X°	3°
X.X	±0.20	X.X°	
X.XX	±0.15	X.XX°	
X.XXX	±0.10	X.XXX°	

DRAW NO.		DATE
DESIGN:	譚立強	2012.02.13
CHECK:		
REVIEW:		

MATERIAL:Brass C3604

FINISH:Au1~3u",Ni,80~120u"

FILE:

P/N:SEE TABLE

REV. A0 SCALE N/A

DRAW NAME: SEE TABLE

UNIT: mm

SHEET: 1/1